



# C7



GLOBAL TREND PRO

## Absen

LED

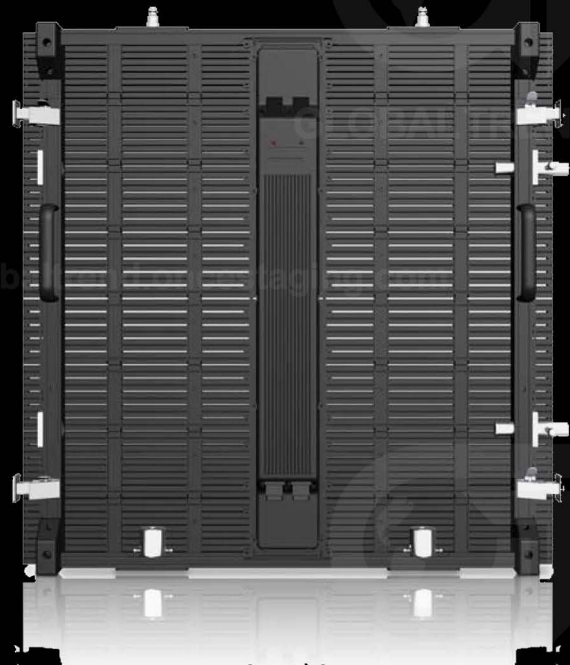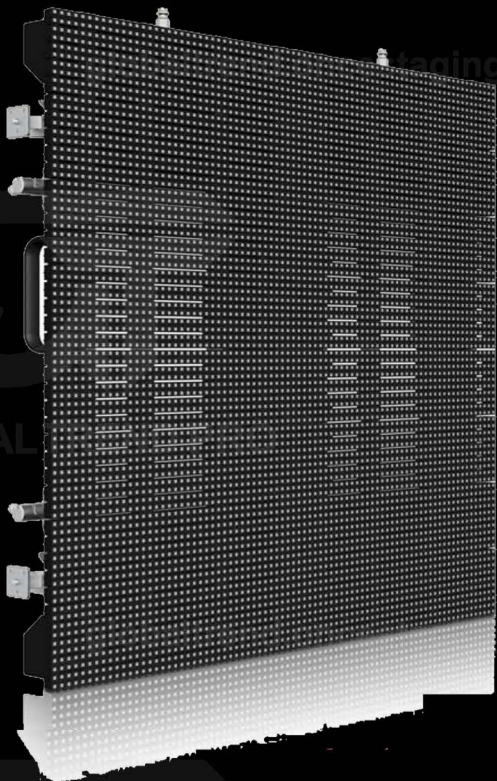

Parameter	Value	Unit
Pixel pitch	7.5	mm
Brightness	≥5000	nits
Panel dimensions (W×H×T)	600 X600X85	mm
Panel dimensions (W×H×T)	23.62×23.62×3.35	Inch
Panel material	Aluminum	—
Weight	9	kg/panel
Weight	19.86	lbs
Pixel configuration	SMD 3in1	—
Module dimensions (W×H)	600×75	mm
Module dimensions (W×H)	23.62×2.95	Inch
Pixel matrix per panel	80×80	pixels

Parameter	Value	Unit
Pixel density	17776	pixels/sq.
Refresh rate	≥1920	m.
Gray scale per color	65536	hz
Colors	281 trillion	level
Viewing angle (H/V)	120/120	—
IP rating (Front/Rear)	IP65/IP65	deg.
Power consumption (max/avg)	760/260	—
Input voltage (AC)	110 ~ 240	w/sq.m.
Operating temperature	-20 ~ 50	V
Operating humidity	10% ~ 90%	°C
Source compatibility (with video processor)	AV, S-Video, VGA, DVI, HDMI, SDI, DP	



High Brightness



Wide Viewing Angle



Wind-Through  
& Light-Through



Light weight



Easy installation



Noise-free



High IP Rating