

8K
Full 8K + HDR
Video Pipeline

**Only 1RU
with Redundant Power**




**HDMI 2.0 and
DisplayPort 1.4**

**4 x SFP
SDI/ST-2110 Inputs**

**80Gbps Fiber
Output**



Megapixel VR's HELIOS® LED Processing Platform reimagines processing from the ground up to support large-format LED displays for use in demanding pro AV, broadcast and installation applications. Leverage the newest 8K and HDR formats to drive screens with the greatest visual impact in only 1RU.

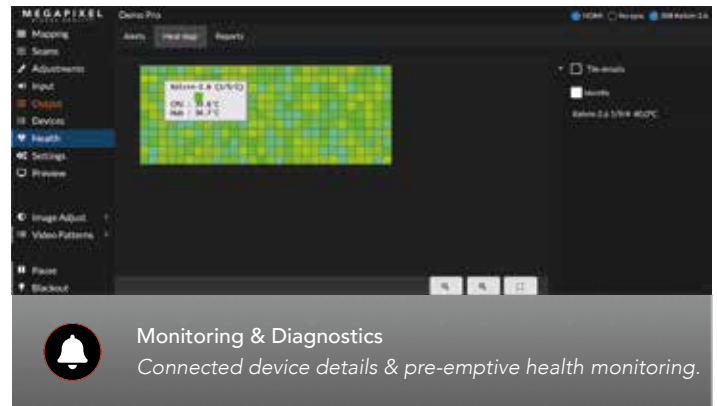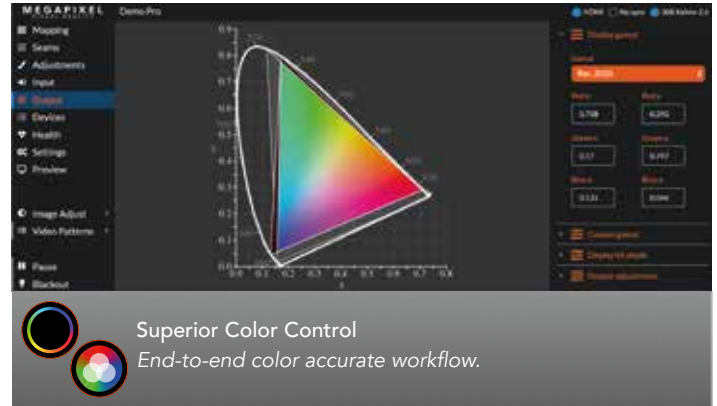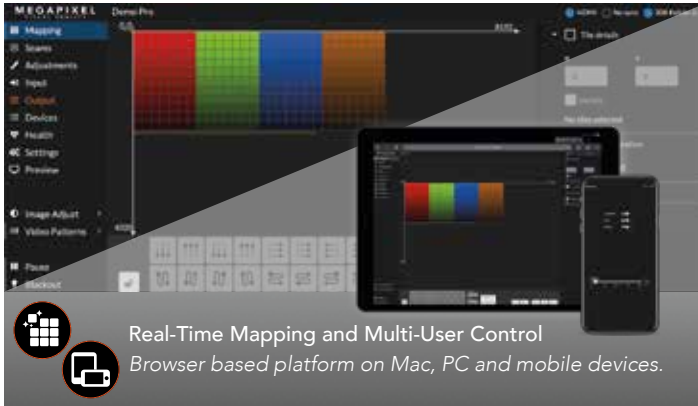

| Specifications | HELIOS Jr | HELIOS 4K | HELIOS 8K |
|---------------------------------|--|---|---------------------------|
| Inputs | 1 x DisplayPort 1.4 up to 8K* and 1 x HDMI 2.0 up to 4096 x 2160 | | |
| | 1 x 12G SDI up to 4096 x 2160 | | 4 x 12G-SDI up to 8K |
| | — | | 4 x SMPTE 2110 up to 8K** |
| | — | Stitch together same format inputs as a single input canvas (up to 4x SDI, 2x DP, or 2x HDMI) | |
| Frame Rates | 23.98, 24, 25, 29.97, 30, 48, 50, 59.94, 60,120, 240Hz*** | | |
| HDR Support | HDR, HLG, PQ Customizable EOTF parameters and re-mappable mastering levels | | |
| Outputs | 8 x 1G Copper SFP | 3 x 10G Fiber SFP+ | 8 x 10G Fiber SFP+ |
| Genlock | Analog Tri-level VSync | | |
| Management | Cross-Platform Web Interface | | |
| (W x H x D in mm/in) Dimensions | 1RU 481.5 x 44.2 x 393 (19 x 1.7 x 16.3) | | |
| (in kg/lbs) Weight | 5.7 (12.6) | | |
| Power | 100 - 240V AC, 50Hz/60Hz, 3A Redundant internal power supplies | | |
| Operating Conditions | Indoor 10°C ~ 35°C | | |
| API | REST API available for system integration | | |

*HBR3 support up to 5K @ 60Hz or 8K @ 30Hz | **Coming Soon | *** At reduced resolution (120 & 240Hz modes)

Copyright © 2022 Megapixel VR®. | Patents and Trademarks Pending Worldwide.
Specifications subject to change without notice. | All Rights Reserved.

GLOBALTRENDDPRO.COM

sales@megapixelvr.com